



产品概述 Product Introduction

WFB系列无密封自控自吸泵采用“连环式”多面离心封装装置，无“跑、冒、滴、漏”之忧。由于运行过程无密封装置摩擦，无磨损，因此使用寿命较同类产品延长数倍。

该泵具有耐温、耐压、耐磨“一次引流，终生自吸”等多种功能，自吸性能可靠，特别是采用“电动空气控制阀”具有运行可靠，拆卸方便，易于安装等特点。


该泵分别采用不锈钢、增强聚丙烯、铸钢等多种材质制造，可分别适用于各种场合，同时根据用户需要，还设计了多种形式，长方形、圆锥形、可为提供不同安装形式的选择余地。防爆型、户外型，可适用于易燃易爆、雨雾、潮湿场合。推车移动型更可将水泵方便地送到您所需要的任何工作岗位上。

WFB packingless autocontrol & self priming pump series adopt "linking" multidimensional centrifugal sealing device, being no trouble from running, emitting, dropping and leaking. Compared with similar products, its service life can be prolonged multiple due to without attrition and abrasion of sealing device during operation.

This pump is provided with such various functions as temperature, pressure, attrition resistance and one flow diversion for lifetime self priming. Being reliable self priming performance, it adopts specially electric air control valve to feature such advantages as credible operation, easy disassembly and installation.

This pump is made of such various materials as stainless steel, reinforced polypropylene and cast steel, etc., respectively suitable for various occasions. Meanwhile, as required by users, we design them in many types like quadrate, conical and so on for different installation modes. Explosion-proof type and outdoor type can be suitable for occasions being flammable, explosive, rainy, foggy and humid. Go-cart movable one even can take the pump to any working post required by you.

型号意义 Type Designation

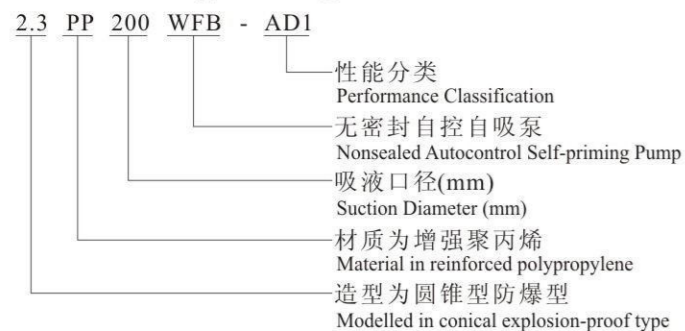

性能参数 Performance Parameter

型号 Type	流量 Flow (m³/h)	扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)	吸液口径 Suction Diameter (mm)
16WFB-A	1.1	6.5	2900	0.75	16
25WFB-A	3.6	25	2900	3	25
32WFB-A	6.5	10.5	2900	1.5	32
40WFB-A	8.5	23	2900	4	40
40WFB-A1	13.5	18	2900	3	40
40WFB-A2	8	13	2900	2.2	40
40WFB-A3	14	8	2900	2.2	40
50WFB-A	12.5	26	2900	5.5	40
50WFB-A1	10.5	20.5	2900	3	50
50WFB-AD	6.3	10	1450	1.5	50
50WFB-AD1	10	6	1450	1.5	50
50WFB-B	11	38	2900	11	50
50WFB-B1	12	31	2900	7.5	50
50WFB-B2	10	26.5	2900	4	50
50WFB-B3	6.4	14	2900	2.2	50
50WFB-C	12	56	2900	15	50
50WFB-C1	10	46	2900	7.5	50
50WFB-C1	12	40	2900	7.5	50
50WFB-CD	6	18	1450	3	50
50WFB-E	12	80	2900	18.5	50
50WFB-E1	12	62	2900	15	50
50WFB-E2	6.3	25	2900	3	50
65WFB-A	20	26	2900	7.5	65
65WFB-A1	21	20	2900	5.5	65
65WFB-AS	12	11	1450	3	65
65WFB-B	25	38	2900	11	65
65WFB-B1	20	26	2900	7.5	65
65WFB-BD	12	14	1450	4	65
65WFB-C	25	56	2900	18.5	65
65WFB-C1	22	14	2900	15	65
65WFB-C2	12.5	18	2900	4	65
65WFB-E	25	80	2900	30	65
65WFB-E1	21	64	2900	18.5	65
65WFB-E1	20	55	2900	18.5	65
65WFB-E2	12.5	26	2900	7.5	65
65WFB-F	25	125	2900	45	65
65WFB-F1	21.5	95	2900	45	65
65WFB-F2	12.5	37	2900	7.5	65
65WFB-F3	9	30	2900	5.5	65
80WFB-A	24	24	2900	11	65

性能参数 Performance Parameter

型号 Type	流量 Flow (m³/h)	扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)	吸液口径 Suction Diameter (mm)
80WFB-AD	10.5	10.5	2900	4	80
80WFB-B	35	35	2900	15	80
80WFB-BD	13	13	1450	5.5	80
80WFB-C	5.5	55	2900	22	80
80WFB-C1	38	38	2900	15	80
80WFB-C1	46	46	2900	15	80
80WFB-C2	18	18	2900	7.5	80
80WFB-CD	14	14	1450	5.5	80
80WFB-CD	12	12	1450	5.5	80
80WFB-E	80	80	2900	37	80
80WFB-E1	60	60	2900	18.5	80
80WFB-E1	50	50	2900	18.5	80
80WFB-E2	26	26	2900	11	80
80WFB-E3	22	22	2900	5.5	80
80WFB-E3	18	18	2900	5.5	80
80WFB-F	120	120	2900	55	80
80WFB-F1	95	95	2900	45	80
80WFB-F2	36	36	2900	11	80
80WFB-F3	30	30	2900	11	80
100WFB-A	22	22	2900	18.5	100
100WFB-AD	50	10	1450	7.2	100
100WFB-B	100	32	2900	22	100
100WFB-BD	50	13	1450	11	100
100WFB-C	80	48	2900	37	100
100WFB-C1	75	40	2900	30	100
100WFB-C1	85	35	2900	30	100
100WFB-C2	50	19	2900	11	100
100WFB-C3	40	16	2900	7.5	100
100WFB-C3	45	15	2900	7.5	100
100WFB-E	80	80	2900	55	100
100WFB-E1	80	60	2900	45	100
100WFB-E1	100	51	2900	45	100
100WFB-E2	50	25	2900	11	100
100WFB-E3	58	22	2900	11	100
100WFB-E3	62	18	2900	11	100
100WFB-F	80	125	2900	90	100
100WFB-F1	90	90	2900	75	100
100WFB-F2	50	38	2900	15	100
100WFB-F3	43	29	2900	11	100
125WFB-A	150	50	2900	55	125

型号 Type	流量 Flow (m³/h)	扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)	吸液口径 Suction Diameter (mm)
125WFB-A1	170	40	2900	45	125
125WFB-A1	185	30	2900	45	125
125WFB-A2	80	19	2900	15	125
125WFB-AD	105	16	1450	15	125
125WFB-AS	110	15	1450	15	125
125WFB-B	180	80	2900	110	125
125WFB-B1	150	65	2900	75	125
125WFB-B1	170	60	2900	75	125
125WFB-B2	100	25	2900	22	125
125WFB-B3	85	22	2900	18.5	125
125WFB-B3	90	20	2900	18.5	125
125WFB-C	180	125	2900	160	125
125WFB-C1	190	93	2900	110	125
125WFB-C2	100	38	2900	30	125
125WFB-C3	85	26	2900	18.5	125
125WFB-E	90	50	1450	37	125
125WFB-E1	90	45	2900	30	125
125WFB-E1	95	40	2900	30	125
125WFB-E2	85	36	2900	22	125
150WFB-A	200	23.5	2900	30	150
150WFB-AD	160	20	1450	22	150
150WFB-B	180	36	1450	45	150
150WFB-BD	220	29	1450	45	150
150WFB-BD	260	25	1450	45	150
150WFB-B1	180	29	1450	37	150
150WFB-BD1	200	50	1450	75	150
150WFB-C	180	45	1450	55	150
150WFB-C	190	38	1450	45	150
150WFB-C1	165	36	1450	37	150
150WFB-AD	330	25	1450	55	150
150WFB-AD1	300	22	1450	45	200
150WFB-AD2	330	19	1450	37	200
150WFB-BD	300	37	1450	75	200
150WFB-BD1	250	28.5	1450	55	200
150WFB-BD2	450	13	1450	45	200
150WFB-CD	380	50	1450	110	200
150WFB-CD1	360	45	1450	90	200
150WFB-CD2	300	40	1450	75	200
150WFB-CD3	330	36	1450	75	200